


BARREL SAUNA VALTER DELUX



CONTENT:

1. Technical information
2. Drawing
3. Delivery
4. Surface treatment of wood

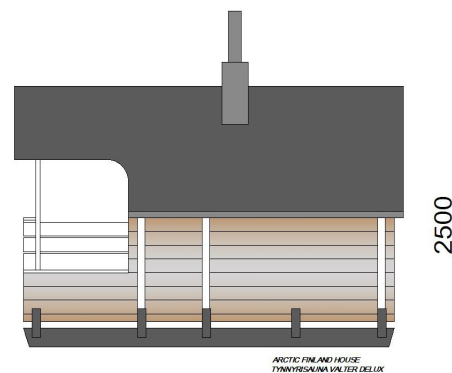

1. Technical information



Barrel sauna Alex Delux



- Valter Delux complete barrel sauna, with room for 5 people
- The material is heat-treated 40mm spruce.
- The roofing consists of pre-fixed black felt shingles.
- The sauna has a fixed arched window.
- The sauna benches are made of heat-treated pine.
- The entrance door is a pine door with a window and a lock.
- The barrel sauna also has a dressing room and a terrace with two bench seats

- Barrel sauna on skids
- Window and entrance door
- Sauna benches and floor grate
- Sauna stove, stove stones, chimney and water tank
- Gutters
- Installation accessories
- Instructions


- | | |
|------------------|---------------|
| • Length | 4,2 m |
| • Space | 5 person |
| • Height | 2 500 mm |
| • Weight | 650 kg |
| • Windows | 1 pcs |
| • Door dimension | 700 x 1870 mm |

2. Drawing


BARREL SAUNA VALTER DELUX

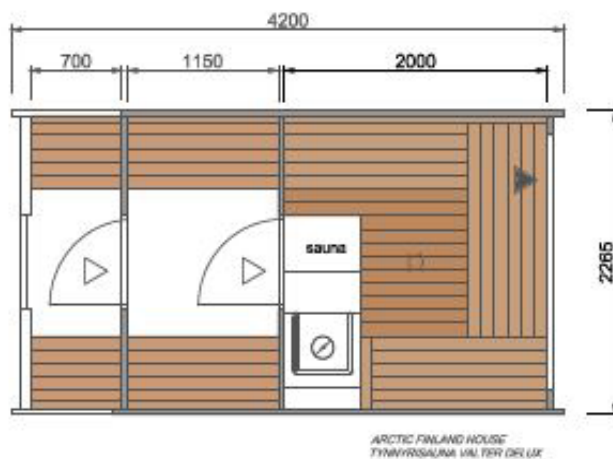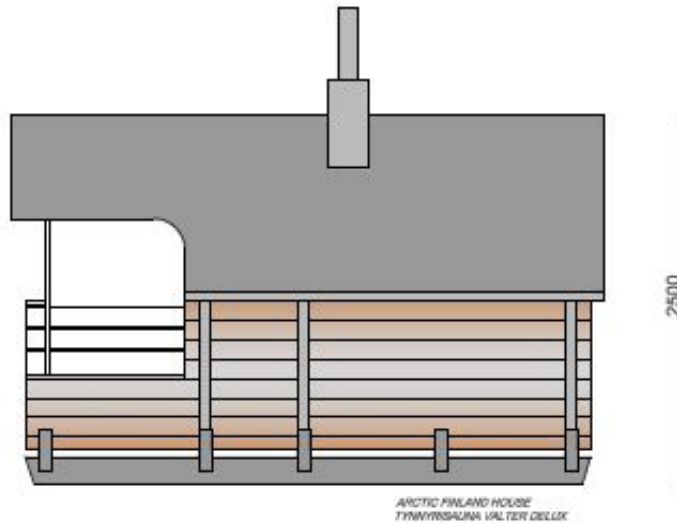

Barrel sauna
Material: heat-treated spruce 40 mm
Roofing felt
Panoramic window and door with a lock
Sauna benches, wooden floors
Sauna stove, stones, chimney and water tank
Dressing room, benches, shelves
Gutters
Terrace with two bench seats

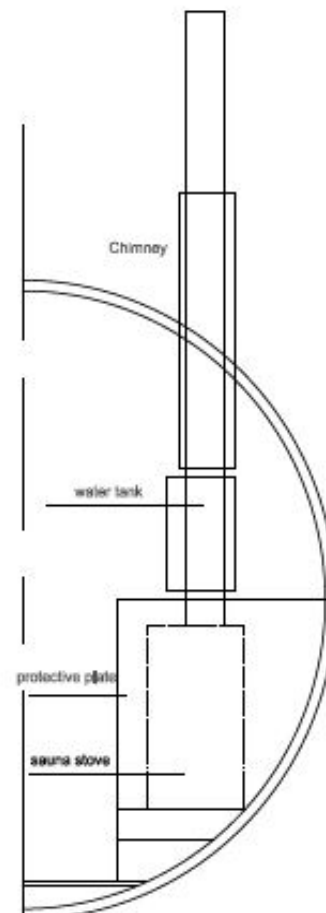

3. Delivery

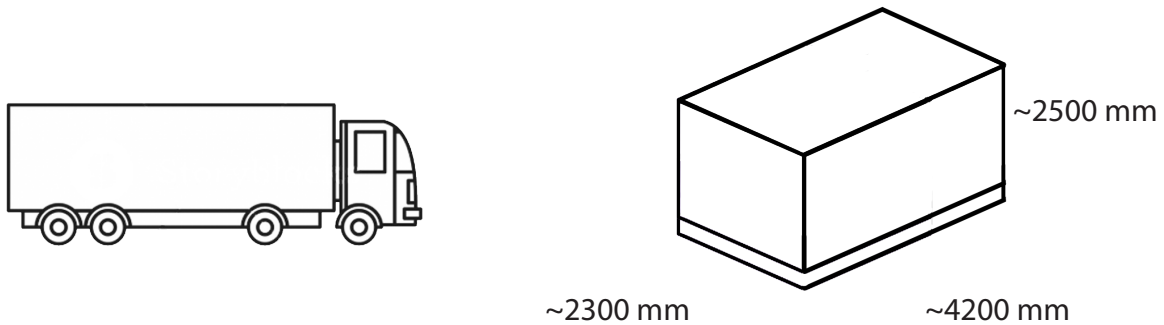

Barrel sauna dimension: 4,2m x 2,3m x 2,5m / 650kg

Barrel sauna Valter Delux will be delivered on the date stated in the order unless otherwise agreed or indicated. The product is brought to the end of a truck-driven road / site boundary. The product is packed on a pallet and protected with plastic. The recipient is expected to be present. Any transport damage must be recorded in the consignment note.

The customer is responsible for any permit procedures for the product and ascertains whether a building permit or notice to the local building control authority is required

4. Surface treatment of wood

The products are made of natural, good quality timber, which is an excellent building material. Thanks to its slow growth, the wood is firm, dense and straight-grained. There are few branches and the proportion of heartwood is large.

Wood is a natural material which tends to change with the weather and environmental conditions. Cracks, colour differences and other structural changes do not make the wood faulty.

The timber of the products is unprocessed. The products are stored and packed on pallets to protect them from the weather. Wood is very sensitive to sunlight and moisture, and therefore we recommend that you treat all wood components immediately or at the latest after the building is erected. The best time is during partly cloudy dry weather (over +5 degrees).

First, use a colourless wood preservative to prevent mould and blue stain. Then finish with a clear / translucent / coloured wood preservative coating or an opaque paint.

All surface treatment agents should be breathable and should not form a dense, non-breathable film on the surface of the wood. Also treat doors and windows with care on both sides.

Make sure you get the right treatment agent from your dealer. Check the wooden structures every year and perform maintenance painting on time.

